


BAG STYLES:



FLAT-BOTTOM



PILLOW STYLE



STANDUP w/
HANDLE



GUSSETED



EUROSLOT/
HOLE PUNCH



QUAD-SEAL

MAXIMUM SPEED:

Up to **70** cycles
per minute

MAXIMUM BAG SIZE:

500 mm x 600 mm
(19.68" x 23.62")
single stroke

MINIMUM BAG SIZE:

150 mm x 100 mm
(5.91" x 3.94")

VIKING MASEK VFFS

E250

E400

ES400

M250

M250 BiB

M400

M500

M650

S250

S400

SACHET SA300-SA500

SIGMA

STICK PACK ST200-ST800

VELOCITY

THE BIG VFFS BAG-MAKER WITH A COMMANDING PRESENCE FOR YOUR BIG BAGS!



FEATURES:


- ☐ Robust stainless steel frame
- ☐ Enclosed, direct drive jaw actuation
- ☐ Off-the-shelf components
- ☐ Minimal maintenance requirements
- ☐ No tool changeover
- ☐ Self-centering pull belts
- ☐ Automatic film tracking
- ☐ VFD powered film unwind
- ☐ Quick film splice table
- ☐ Product stagers
- ☐ End-seal cooling air
- ☐ Bag deflators
- ☐ Photo eye and encoder
- ☐ Jaw obstruction detection
- ☐ Runs most film structures
- ☐ Storage for 100 product recipes

OPTIONS:


- ☐ Quad seal bag assembly
- ☐ Flat bottom bag assembly
- ☐ Siemens or Allen Bradley control platform
- ☐ Impulse sealing for poly film structures
- ☐ Integration with variety of fillers, printers, metal detectors, label applicators, and checkweighers
- ☐ Washdown construction
- ☐ Vacuum pull belts
- ☐ Fold-down/tape-down unit
- ☐ Zipper Applicator
- ☐ Hole punch (Euroslot and Round)
- ☐ Carry-handle punch
- ☐ Load shelf
- ☐ Product settler
- ☐ Gas flush
- ☐ Static eliminator
- ☐ Tear notch
- ☐ Degassing valve applicator
- ☐ In-feed and take-away conveyors
- ☐ Remote diagnostics

M500 VIEWS:


FRONT

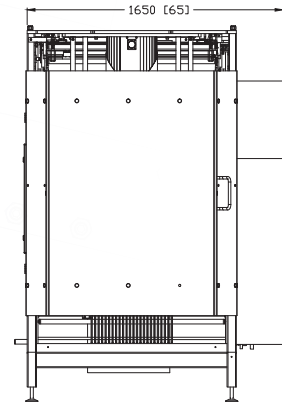

SIDE

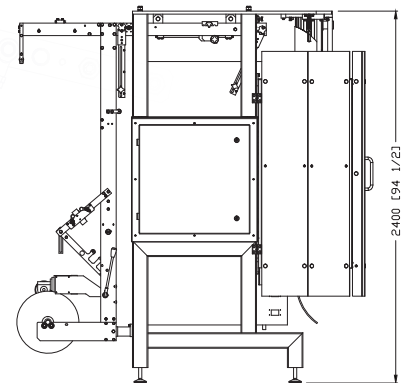

TOP

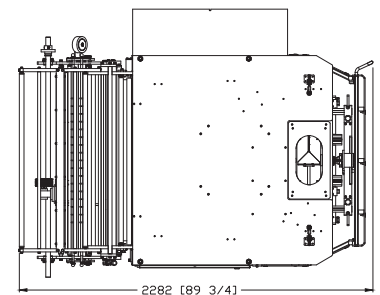

Standard views, dimensions may vary.

