





BAG STYLES:



PILLOW STYLE



PILLOW STYLE
w/EURO-SLOT



GUSSETED

MAXIMUM SPEED:

Up to **300** cycles
per minute

MAXIMUM BAG SIZE:

250 mm x 1000 mm
(9.84" x 39.3")

MINIMUM BAG SIZE:

50 mm x 100 mm
(1.97" x 3.94")

VIKING MASEK VFFS

E250

E400

ES400

M250

M250 BiB

M400

M500

M650

S250

S400

SACHET SA300-SA500

SIGMA

STICK PACK ST200-ST800

**ACCELERATE YOUR PACKAGING PROJECTS WITH THE FASTEST CONTINUOUS
MOTION VFFS PACKAGING MACHINE IN THE WORLD!**



FEATURES:


- ☐ Robust stainless steel frame
- ☐ Servo jaw actuation
- ☐ Patented, dual, rotary jaws
- ☐ Continuous motion
- ☐ Vacuum pull belt
- ☐ Small footprint
- ☐ Short film path
- ☐ Minimal maintenance requirements
- ☐ Film unwind with tension control
- ☐ Product stagers
- ☐ Bag deflators
- ☐ Photo eye and encoder
- ☐ Runs most film structures
- ☐ Storage for 50 product recipes
- ☐ Quick film splice table
- ☐ No tool changeover
- ☐ Off-the-shelf components

OPTIONS:


- ☐ Gusset assembly
- ☐ Washdown construction
- ☐ Integration with variety of fillers, printers, metal detectors, label applicators, and checkweighers
- ☐ Siemens or Allen Bradley control platform
- ☐ In-feed and take-away conveyors
- ☐ Gas flush
- ☐ Tear notch
- ☐ Round or Euro hole punch
- ☐ End-seal cooling air
- ☐ Promotion strip applicator
- ☐ Chain-bag capability

VELOCITY VIEWS:


FRONT

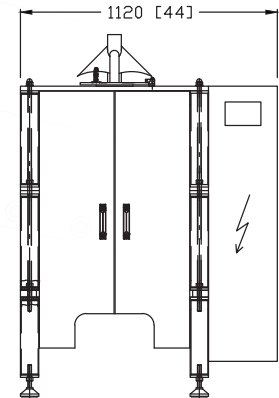

SIDE

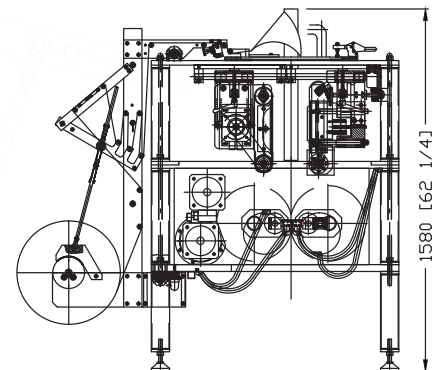

TOP

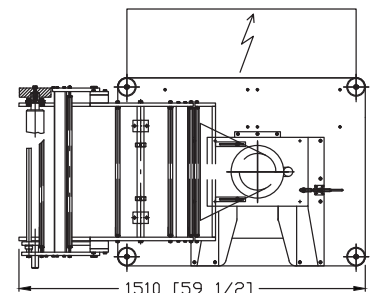

Standard views, dimensions may vary.

